




Bearing import and Export Co., Ltd

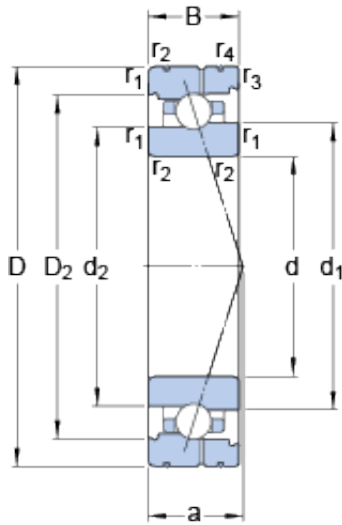

75 mm x 115 mm x 20 mm SKF 7015 ACB/P4AL angular contact ball bearings

Bearing No. 7015 ACB/P4AL

Size	115x75x20 mm
Bore Diameter	115 mm
Outer Diameter	75 mm
Width	20 mm
d	75 mm
D	115 mm
B	20 mm
d ₁	90 mm
d ₂	88.2 mm
D ₂	102.8 mm
b	1.5 mm
C ₁	10.9 mm
C ₂	4.4 mm
C ₃	2.9 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
a	32.3 mm
d _a - min.	81 mm
d _b - min.	81 mm
D _a - max.	109 mm
D _b - max.	111.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
d _n	91.1 mm

7015 ACB/P4AL Bearing 2D drawings and 3D CAD models



Bearing import and Export Co., Ltd

Basic dynamic load rating - C	19 kN
Basic static load rating - C ₀	16.6 kN
Fatigue load limit - P _u	0.71 kN
Limiting speed for grease lubrication	14000 r/min
Limiting speed for oil lubrication	22000 mm/min
Ball - D _w	7.938 mm
Ball - z	30
G _{ref}	7.7 cm ³
Calculation factor - e	0.68
Calculation factor - Y ₂	0.87
Calculation factor - Y ₀	0.38
Calculation factor - X ₂	0.41
Calculation factor - Y ₁	0.92
Calculation factor - Y ₂	1.41
Calculation factor - Y ₀	0.76
Calculation factor - X ₂	0.67
Preload class A - G _A	115 N
Preload class B - G _B	230 N
Preload class C - G _C	690 N
Calculation factor - f	1.08
Calculation factor - f ₁	0.99
Calculation factor - f _{2A}	1
Calculation factor - f _{2B}	1.01
Calculation factor - f _{2C}	1.04
Calculation factor - f _{HC}	1
Preload class A	133 N/micron
Preload class B	169 N/micron



Bearing import and Export Co., Ltd

Preload class C	255 N/micron
d_1	90 mm
d_2	88.2 mm
D_2	102.8 mm
C_1	10.9 mm
C_2	4.4 mm
C_3	2.9 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	81 mm
d_b min.	81 mm
D_a max.	109 mm
D_b max.	111.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
d_n	91.1 mm
Basic dynamic load rating C	25.1 kN
Basic static load rating C_0	27 kN
Fatigue load limit P_u	0.71 kN
Attainable speed for grease lubrication	14000 r/min
Attainable speed for oil-air lubrication	22000 r/min
Ball diameter D_w	7.938 mm
Number of balls z	30
Reference grease quantity G_{ref}	7.7 cm ³
Preload class A G_A	115 N
Static axial stiffness, preload class A	133 N/ μ m
Preload class B G_B	230 N
Static axial stiffness, preload class B	169 N/ μ m
Preload class C G_C	690 N



Bearing import and Export Co., Ltd

Static axial stiffness, preload class C	255 N/ μ m
Calculation factor f	1.08
Calculation factor f_1	0.99
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.01
Calculation factor f_{2C}	1.04
Calculation factor f_{HC}	1
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	0.7 kg